



Elliptic Beverage Dispenser

Models: **LD177**-2 Gallon Dispenser **LD175**-4 Gallon Dispenser

Before first use, make sure to hand wash all components of the beverage dispenser in warm soapy water. This dispenser is not dishwasher safe! For best results, use filtered or bottled water in dispenser.

SETTING UP YOUR PRODUCT

1. Carefully remove all parts from packaging and poly bags.
2. Make sure you have all parts listed before discarding packaging.
 - a. Acrylic Lid
 - b. Acrylic Tank (2 gallon or 4 gallon)
 - c. Stainless Steel Faucet
 - d. Stainless Steel Base
 - e. Black Drip Tray

3. Make sure to hand wash tank and lid in warm soapy water before first use.

CARING FOR YOUR CONTAINER



Keep your beverage dispenser in good working order with these cleaning and handling tips:

- **Do not place any part of your beverage dispenser in the freezer or dishwasher**
- Hand wash all acrylic parts with warm soapy water
- Rinse and dry with soft cloth for best results
- Do not use alcohol, ammonia, or any chemical based cleaners to clean dispenser
- Do not use abrasive materials such as scrapers or metal based brushes on dispenser
- **DO NOT use hot liquids with this beverage dispenser, ONLY use cold liquids with this product**

Stainless Steel Care Instructions:

- Handwash your Stainless Steel Base with a damp washcloth. Use any glass surface or stainless steel cleaning product to remove surface stains.
- To keep it protected, stow your Stainless Steel Base in the box it came in.

Dimensions: LD177- (IN) 11.0" x 11.3" x 14" - (CM) 27.9 x 28.7 x 35.6
 LD175- (IN) 11.0" x 11.3" x 22.3" - (CM) 27.9 x 28.7 x 56.6
 Capacity: LD177- 2 Gallons / 7.6 Liters
 LD175- 4 Gallons / 15.1 Liters

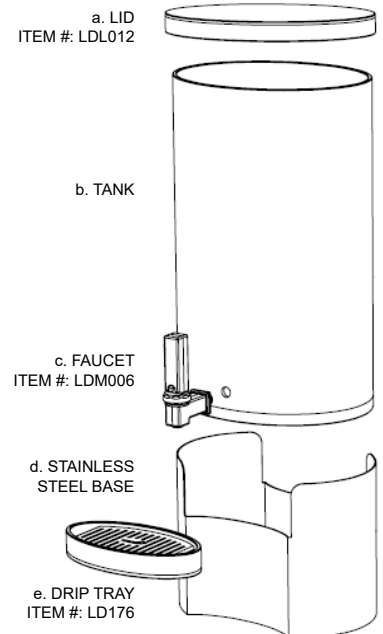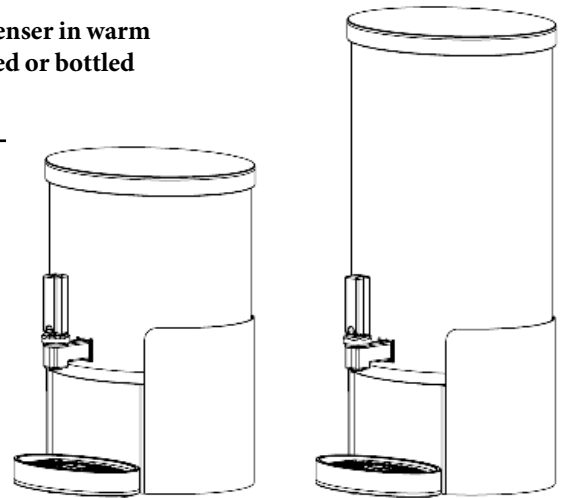

NEED ASSISTANCE?

Please contact our customer service support at (847) 763-1215 and we'll be happy to assist with any assembly questions, comments, or concerns.


ROSSETO® 3714 Jarvis Avenue, Skokie, IL 60076
 Visit our website at www.rosseto.com

Elliptic Beverage Dispenser

SETTING UP YOUR PRODUCT

HOW TO DISASSEMBLE:

1. Detach faucet from dispenser by unscrewing hex nut from inside tank (Figures A-1 & A-2).
2. Pull out faucet body and silicone washer from front, retrieve hex nut from inside tank.
3. Detach upper assembly from faucet body by unscrewing bonnet (Figure B). Once the upper assembly is separated from the faucet body, pull seat cup away from handle/bonnet (Figure C). NOTE: If seat cup remains in faucet body after it was detached from the upper assembly, remove seat cup from faucet body.
4. Clean all parts in warm soapy water.

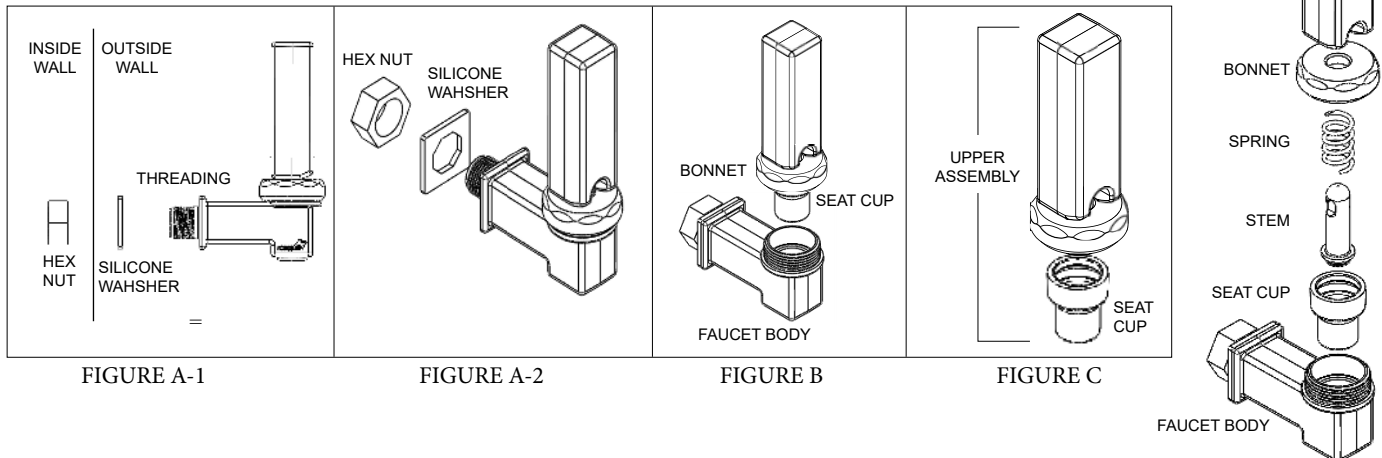

HOW TO ASSEMBLE:

1. Place seat cup over stem/spring on upper assembly. Securely lock the stem into the base of the seat cup. You will know when the seat cup is securely locked in place when it will not detach from stem easily.
2. Hand tighten upper assembly/bonnet onto faucet body. You will know that the bonnet is properly installed if no threading is seen on the faucet body.
3. Install the faucet body onto body of dispenser. Place silicone washer over threading of faucet body **MAKING SURE SILICONE WASHER IS FLUSH WITH BACK OF FAUCET BODY** (Figures A-1 & A-2).
4. With one hand, place threading of faucet body through hole in front of the dispenser. With the other hand, screw the hex nut onto the faucet from the inside of dispenser to secure. Hand tighten only
5. Fill container at location of dispensing. Drain dispenser at the end of the day before moving. If full, 2 people are required to move dispenser

NEED ASSISTANCE?

Please contact our customer service support at (847) 763-1215 and we'll be happy to assist with any assembly questions, comments, or concerns.

ROSSETO® 3714 Jarvis Avenue, Skokie, IL 60076
Visit our website at www.rosseto.com